


### FEATURE

. 주문제작

### SPECIFICATION

MODEL	CBB
Rated capacity (R.C.)	1, 2tf
Rated output (R.O.)	1.5 ± 0.005 mV/V
Zero balance	0 ± 0.15 mV/V
Combined error	2.0% R.O.
Repeatability	0.3% R.O.
Creep for 30 min	0.1% R.O.
Temp. effect on zero value	0.05% / 10°C
Temp. effect on output value	0.05% / 10°C
Excitation recommended	10V DC
Excitation maximum	15V DC
Terminal resistance, input	400 ± 50Ω
Terminal resistance, output	350 ± 3.5Ω
Insulation resistance	> 2000MΩ @ 50V DC
Compensated temperature range	-10 to +40°C
Operating temperature range	-20 to +80°C

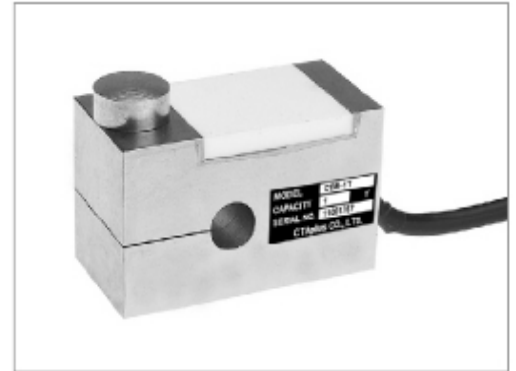

- Material  
Stainless steel
- Cable  
Braided shield 4-wire round cable with PVC-jacket

### DIMENSION (mm)

